




# Flange Bushings - Inch - for Quick stainless steel

## Lanyards

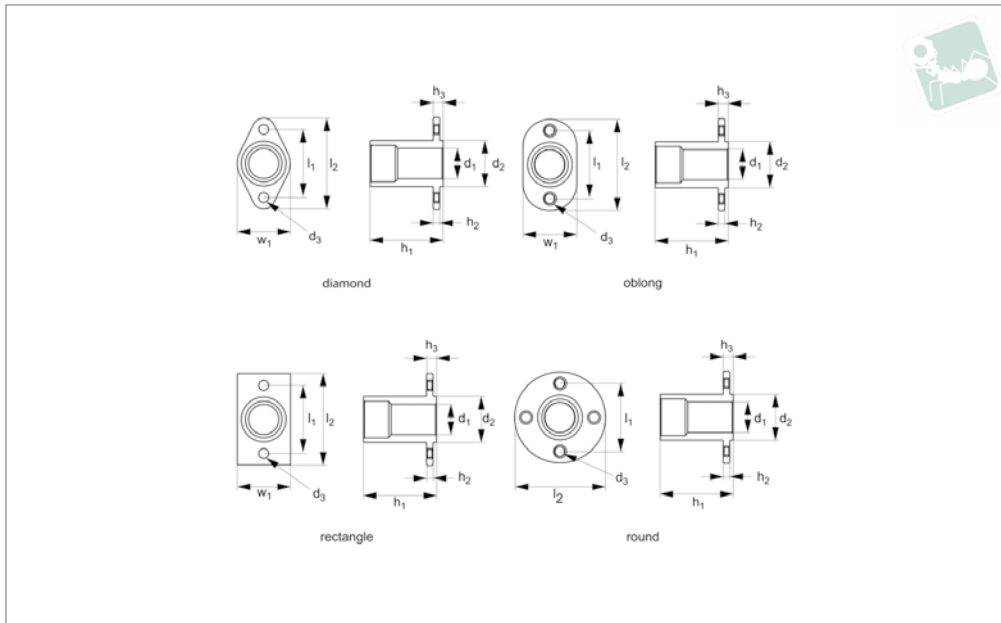

## LA1320

LANYARDS

### Material

Stainless steel, AISI 303.

### Technical Notes

Provide permanent and proper locating hole for quick release pins. For use in applications with soft/weak metals, or


where no proper locking surface is available. Ideal for blind hole applications, as pin will not protrude from base of bushing.

Mounted with screws, rivets or bolts.

### Important Notes

Quick release pins must be inserted from flanged end. \*\*When used, bushings reduce the usable or grip length of quick release pin. Refer to 'Grip length reduction' value in data table.

Order No.	Flange style	d <sub>1</sub> pin dia. nom.	Grip length reduction	d <sub>2</sub> ±0.005	d <sub>3</sub>	h <sub>1</sub> +0.000 -0.005	h <sub>2</sub> ±0.005	h <sub>3</sub>	l <sub>1</sub> ±0.005	l <sub>2</sub> ±0.010	w ±0.010
LA1320.I18-DI	Diamond	3/16	,375	,375	6-32	,650	,060	,06	1000	1.25	,625
LA1320.I25-DI	Diamond	1/4	,375	,375	6-32	,650	,060	,06	1000	1.25	,625
LA1320.I31-DI	Diamond	5/16	,500	,469	6-32	,783	,060	,06	1000	1.25	,625
LA1320.I37-DI	Diamond	3/8	,562	,562	6-32	,913	,060	,06	1000	1.25	,625
LA1320.I50-DI	Diamond	1/2	,750	,750	10-32	1195	,100	,06	1125	1.50	,875
LA1320.I18-OB	Oblong	3/16	,375	,375	6-32	,650	,060	,06	1000	1.25	,625
LA1320.I25-OB	Oblong	1/4	,375	,375	6-32	,650	,060	,06	1000	1.25	,625
LA1320.I31-OB	Oblong	5/16	,500	,469	6-32	,783	,060	,06	1000	1.25	,625
LA1320.I37-OB	Oblong	3/8	,562	,562	6-32	,913	,060	,06	1000	1.25	,625
LA1320.I50-OB	Oblong	1/2	,750	,750	10-32	1195	,100	,06	1125	1.50	,875
LA1320.I18-RE	Rectangle	3/16	,375	,375	6-32	,650	,060	,06	1000	1.25	,625
LA1320.I25-RE	Rectangle	1/4	,375	,375	6-32	,650	,060	,06	1000	1.25	,625
LA1320.I31-RE	Rectangle	5/16	,500	,469	6-32	,783	,060	,06	1000	1.25	,625
LA1320.I37-RE	Rectangle	3/8	,562	,562	6-32	,913	,060	,06	1000	1.25	,625
LA1320.I18-RO	Round	3/16	,375	,375	6-32	,650	,060	,06	1000	1.25	-
LA1320.I25-RO	Round	1/4	,375	,375	6-32	,650	,060	,06	1000	1.25	-
LA1320.I31-RO	Round	5/16	,500	,469	6-32	,783	,060	,06	1000	1.25	-
LA1320.I37-RO	Round	3/8	,562	,562	6-32	,913	,060	,06	1000	1.25	-
LA1320.I50-RO	Round	1/2	,750	,750	10-32	1195	,100	,06	1125	1.50	-



flange receptacles are used to give a permanent mounting hole in materials where the balls have nothing to lock against.